
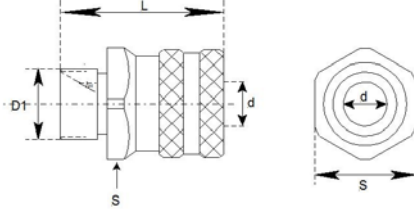

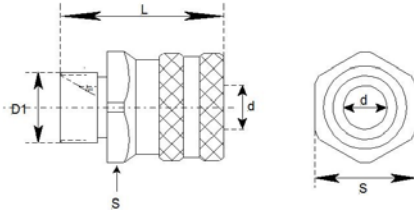

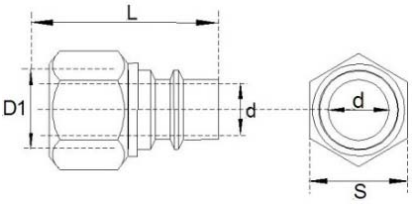

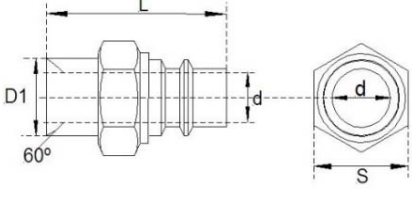


St. St. quick release couplers and adapters (“Snap-Tite” compatible)

These stainless steel quick release couplers and adapters are compatible with “Snap-Tite” couplers, and simplify the connection of water guns and hoses, lances and other accessories. The male threaded parts have conical sealing possibility.



Technical Specifications	
Body/ring	: AISI 303
Spring/locking ring	: AISI 301
Balls	: AISI 420
Seal	: VITON (FDA)
Max. pressure	: 200 bar
Max. temperature	: 100 °C

Quick Release Couplings						
 COUSB1/2-M		COUSB1/2-M : Quick release coupler 1/2" BSP male				
		Reference	L	d	D1	S
		COUSB1/2-M	47,0	11,0	1/2"	30,0
<i>L, d and S in mm</i>						
 COUSB1/2-F		COUSB1/2-F : Quick release coupler 1/2" BSP female				
		Reference	L	D	D1	S
		COUSB1/2-F	41,4	16,0	1/2"	30,0
<i>L, d and S in mm</i>						
Adapters						
 ADSNB1/2-F		ADSNB1/2-F : Adapter 1/2" BSP female				
		Reference	L	d	D1	S
		ADSNB1/2-F	37,5	11,8	1/2"	27
<i>L, d and S in mm</i>						
 ADSNB1/2-M		ADSNB1/2-M : Adapter 1/2" BSP male				
		Reference	L	D	D1	S
		ADSNB1/2-M	45,3	11,8	1/2"	22
<i>L, d and S in mm</i>						